


## Thyristor Surge Suppressor

Version: A1 2017-12-11

### Features

- Excellent capability of absorbing transient surge
- Quick response to surge voltage (nS Level)
- Low Capacitance <55pF
- Eliminates overvoltage caused by fast rising transients
- Moisture sensitivity level: Level 1
- Weight: 87mg
- Non degenerative

### Exterior

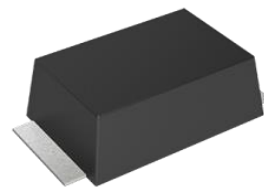

SMB-F

### Application Information

- Video

### Package (Top View)



### Agency Approvals

Icon	Description
<b>RoHS</b>	Compliance with 2011/65/EU
<b>HF</b>	Compliance with IEC61249-2-21:2003

### Schematic Symbol



### Part Number and Electrical Parameter

Part Number	IDRM@VDRM		Vs <sup>①</sup> @ Is		VT@ IT		IH	Co <sup>②</sup>
	μA	V	V	mA	V	A	mA	pF
	MAX		MAX		MAX		MIN	MAX
BS0060N-C-FLC	5	6	25	800	4	2.2	15	55

Absolute maximum ratings measured at TA= 25°C RH = 45%-75% (unless otherwise noted).

① Vs is measured at 100KV/S

② Off-state capacitance is measured at VDC=2V, VRMS=1V, f=1MHz

## Thyristor Surge Suppressor

Version: A1 2017-12-11

### Part Numbering System

BS 0060 N C F LC  
(1) (2) (3) (4) (5) (6)

- (1) Bencent Semiconductor Surge Arrester  
(2) Off-state Voltage, e.g.: 0060=6×10<sup>0</sup>=6V  
(3) Package: SMB-F,  
(4) 6KV (10/700μs)  
(5) Flat Feet  
(6) Low Capacitance


### Mark



6NCLC: Part Number  
1308: August, 2013

### V-I Curve

Parameters	Definition
V <sub>DRM</sub>	Peak off-state voltage
I <sub>DRM</sub>	Off-state Current
V <sub>S</sub>	Switching Voltage
I <sub>S</sub>	Switching Current
I <sub>H</sub>	Holding Current
V <sub>T</sub>	On-state voltage
I <sub>T</sub>	On-state current
C <sub>O</sub>	Off-state capacitance

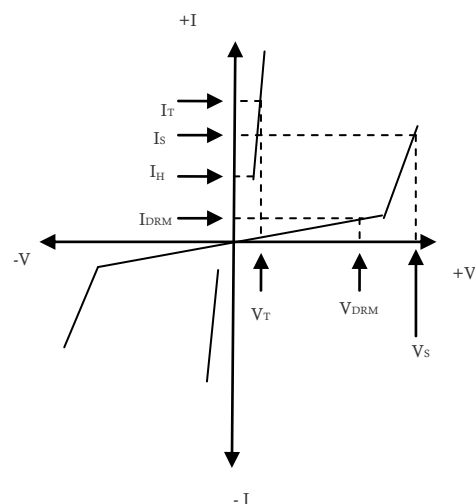

### Surge Ratings

Current Waveform	5/320μs*
Voltage Waveform	10/700μs*
I <sub>pp</sub>	150A

-Peak pulse current rating (I<sub>pp</sub>) is repetitive and guaranteed for the life of the product;

-Bencent only makes the test for 5/320μs@150A\* (10/700μs@6KV) Bencent will not take any obligation for these parameters, so before applying our parts, please make sure to verify the parameters listed in the above table.



### Thermal Considerations

Symbol	Parameter	Value	Unit
T <sub>J</sub>	Operating Junction Temperature Range	-40 to +150	°C
T <sub>S</sub>	Storage Temperature Range	-60 to +150	°C

### Product Characteristics

Lead Material	Copper Alloy
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Terminal Finish	100% Matte-Tin Plated

## Typical Characteristics

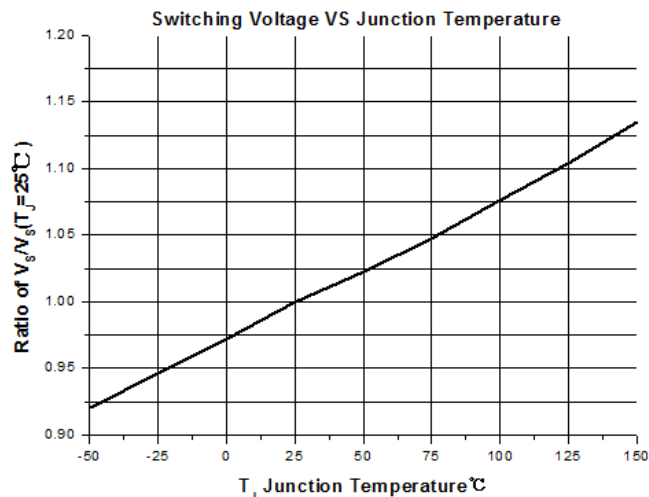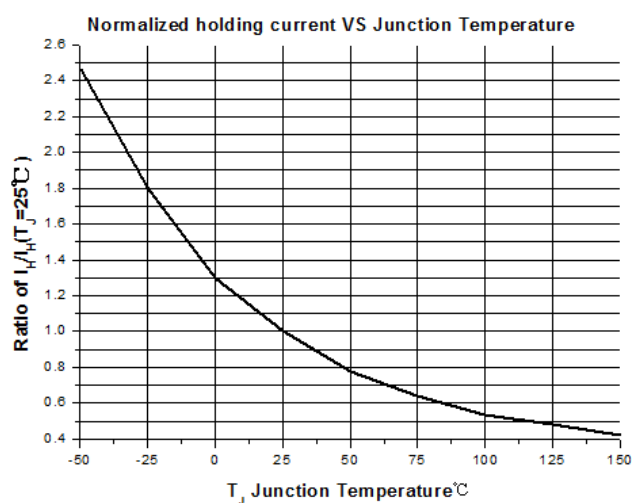


## Environmental Characteristics

Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: 125±3℃, Bias=80%V <sub>DRM</sub> Time: 168H
High Temperature Life Test	Temperature: 150℃ Time: 168H
High-low Temperature Cycle test	Temperature: From -40℃ to 125℃ Dwell time: 30min, 10cycles
High Temperature & High Humidity Test	Temperature: 85℃, Humidity: 85% Test time: 168H
Pressure cooker Test	Temperature: 121℃, 2atm, Humidity: 100% Test time: 24H
Resistance of soldering heat	Temperature: 260±5℃ Time of dip soldering: 10s., 3times


Note: The above testing items can be specified by customer's special request.

## Product Dimensions

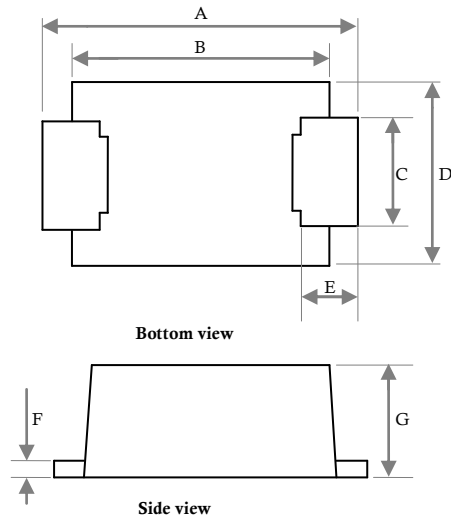

REF	mm	inch
A	5.4±0.3	0.213±0.012
B	4.4±0.2	0.173±0.008
C	2.0±0.1	0.079±0.004
D	3.3±0.3	0.130±0.012
E	0.8±0.3	0.032±0.012
F	0.25±0.05	0.010±0.002
G	2±0.3	0.079±0.012


## Recommended Soldering Pad

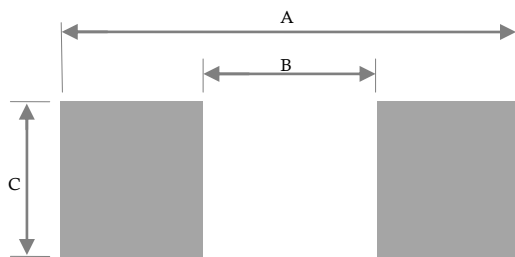


REF	mm	inch
A	6.4	0.252
B	3.4	0.134
C	2.75	0.108

## Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) T <sub>amp</sub> (T <sub>L</sub> ) to peak		3°C/second max
T <sub>S</sub> (max) to T <sub>L</sub> - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T <sub>L</sub> ) (Liquid)	217°C
	- Temperature (T <sub>L</sub> )	60 – 150 seconds
Peak Temperature (T <sub>P</sub> )		260±0/-5 °C
Time within 5°C of actual peak Temperature (T <sub>P</sub> )		25seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T <sub>P</sub> )		8 minutes Max.
Do not exceed		260°C

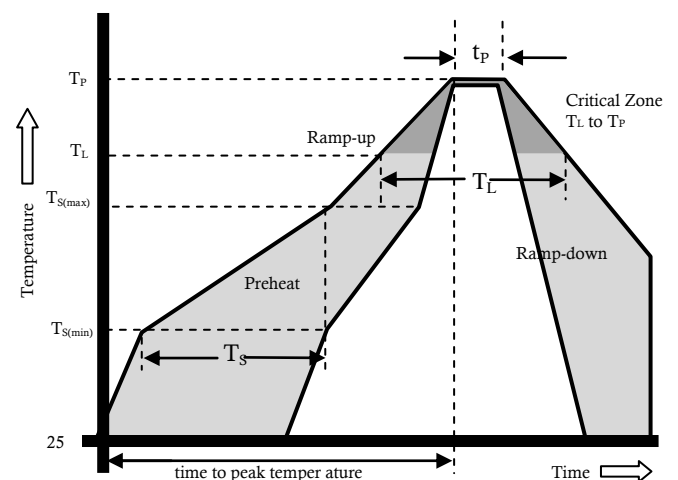

## Package Reel Information

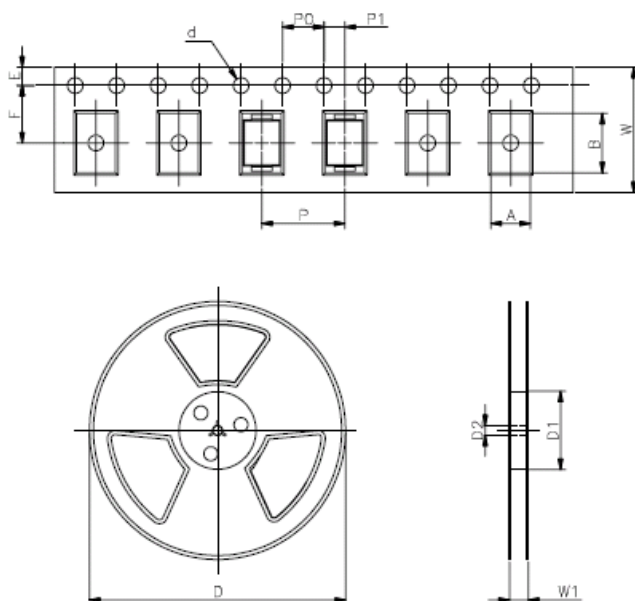

REF	mm	inch
A	3.65+/-0.3	0.144+/-0.012
B	5.69+/-0.3	0.244+/-0.012
d	1.5+/-0.1	0.059+/-0.004
D	330.0	13.0
D1	100+/-3	3.937+/-0.118
D2	13+/-0.3	0.512+/-0.012
E	1.5+/-0.2	0.059+/-0.008
F	5.65+/-0.2	0.222+/-0.008
P	8.0+/-0.2	0.315+/-0.008
P0	4.0+/-0.2	0.157+/-0.008
P1	2.0+/-0.2	0.079+/-0.008
W	12.0+/-0.2	0.472+/-0.008
W1	16.8+/-2.0	0.661+/-0.079

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	3,000	48,000	330	360	360	385